

ACCESSORIES FLANGES


-  CERTIFIED HYGIENIC
-  MINIMIZED CLEANING TIME
-  MINIMIZED WATER USAGE

The flange is used when mounting the XHF levelling feet into the machine or equipment.

Machinery and equipment requires different mounting and therefore the flange is available in several variations.

- Squared
- Round
- Large variety of sizes
- Install by bolting or welding

Customized sizes and shapes can be supplied by request.

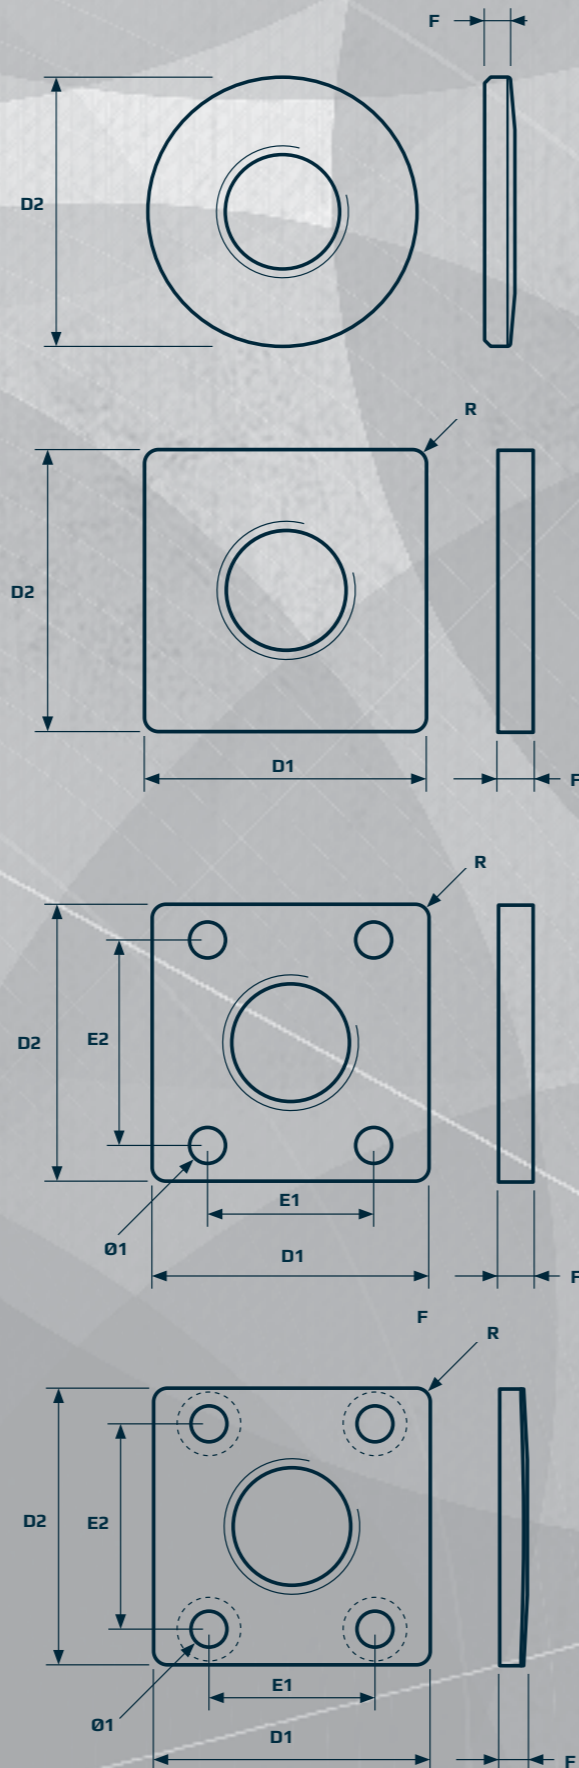

ACCESSORIES FOR LEVELLING FEET FLANGES



ROUND - WELDING



CERTIFICATE	DIAMETER Ø [mm]	THICKNESS F [mm]	THREAD	ITEM CODE
YES	60,3	10	M44x2,0	WFRX060
YES	70,0	10	M44x2,0	WFRX070
YES	76,2	10	M44x2,0	WFRX076
YES	88,9	10	M44x2,0	WFRX089

SQUARED - WELDING



CERTIFICATE	LENGHT D1 [mm]	WIDTH D2 [mm]	THICKNESS F [mm]	RADIUS R [mm]	THREAD	ITEM CODE
NO	80	80	10	5	M44X2,0	WFSF080
NO	100	100	10	5	M44X2,0	WFSF100

SQUARED - BOLTING



CERTIFICATE	LENGHT D1 [mm]	WIDTH D2 [mm]	THICKNESS F [mm]	DISTANCE E1 [mm]	DISTANCE E2 [mm]	HOLE Ø1 [mm]	RADIUS R [mm]	THREAD	ITEM CODE
NO	100	100	10	74,2	60,0	13	5	M44x2,0	WFSF10010746013
NO	100	100	10	74,2	74,2	9	5	M44x2,0	WFSF10010747409

SQUARED - BOLTING



CERTIFICATE	LENGHT D1 [mm]	WIDTH D2 [mm]	THICKNESS F [mm]	DISTANCE E1 [mm]	DISTANCE E2 [mm]	RADIUS R [mm]	HOLE Ø1 [mm]	THREAD	ITEM CODE
YES	100	100	10	74,2	60,0	5	13	M44x2,0	WFSX10010746013
YES	100	100	10	74,2	74,2	5	9	M44x2,0	WFSX10010747409



Squared hygienic flanges must be installed with certified washers and bolts. Flat flanges are not 3-A, USDA & EHEDG certified.